

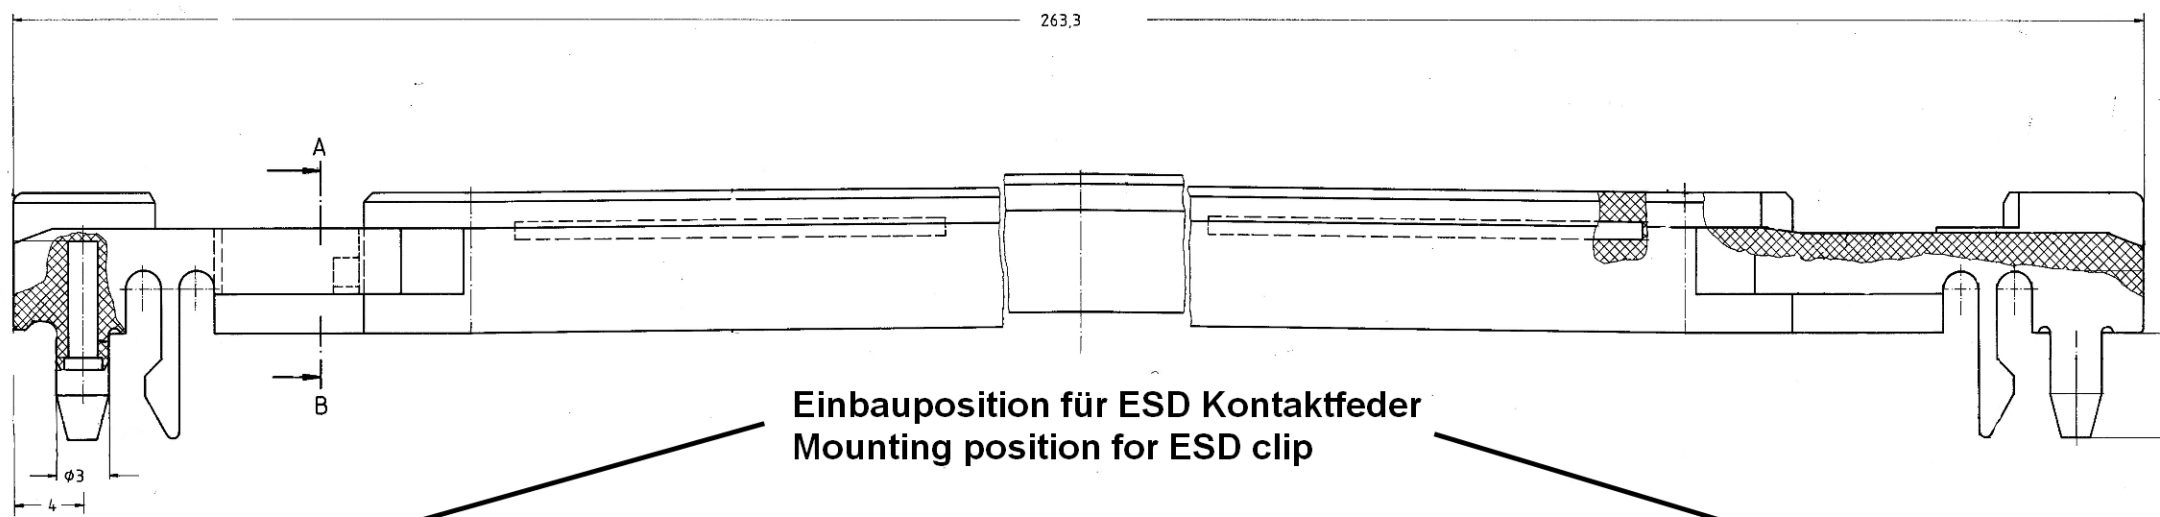




The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

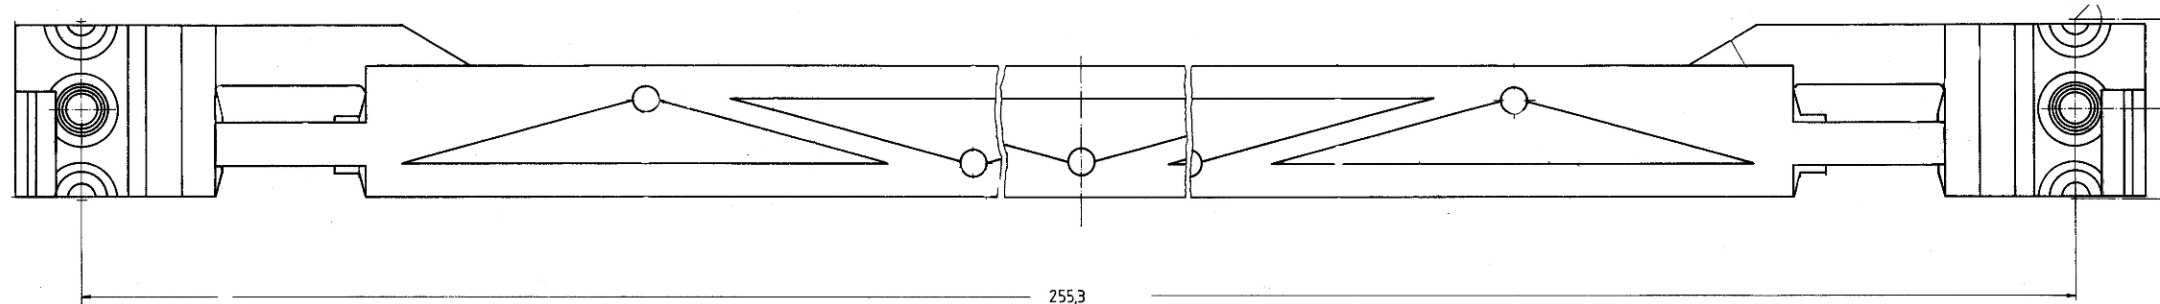

Einbauposition für ESD Kontaktfeder
Mounting position for ESD clip

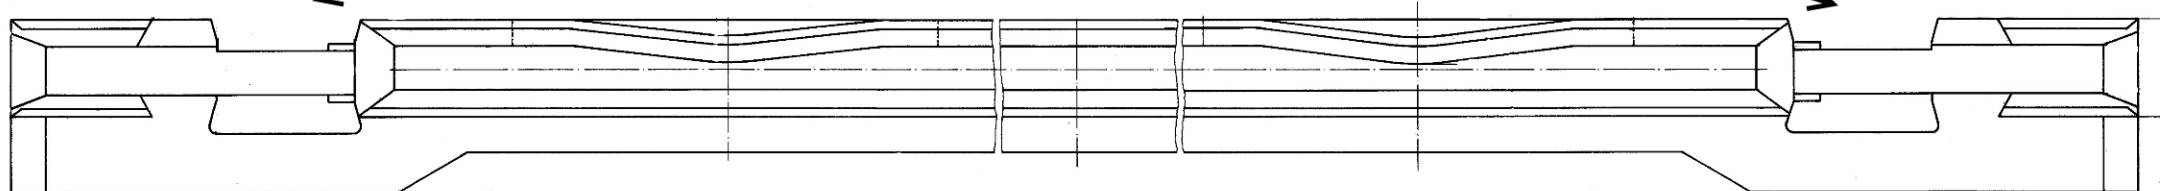

Ansicht / view X

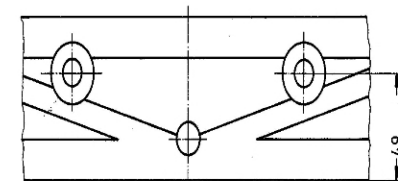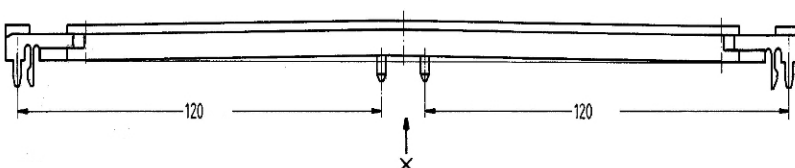

Geeignet für Leiterplatten bis zu 2mm Nennstärke
For PCBs up to 2mm thickness

1) Technische Aenderungen vorbehalten
Subject to change without notice

Dieses Bauteil unterliegt den Reglementierungen der RoHS Richtlinie und deren Umsetzung im ElektroG.

This component is subject to the RoHS directive and its applications within the Electrical and Electronic Equipment Act (ElektroG).

Artikel / Part: 3684662

Farbe / color : RAL 7032 grau / grey

		Toleranzen tolerances		Oberfläche surface —		Maßstab/scale					
						Kunststoff / plastic PC GF20 UL94-V0					
				Date	22.05.13	Kartenführung 280 mm ESD einrastbar / verschraubbar Guide rail 280mm ESD snap in / screw fastening				1 Blätter sheets	
				Name	Kör.						
				Prf.							
				HEITEC							
Rev.	Rev no.	Date	Name			226203015400 MB		Blatt sheet		1	